Beat-Sonic®

PRIUS
プリウス30系専用

NO:000002

FDA51 User's Manual

Thank you for purchasing Beat-Sonic USA Shark Fin AM/FM Antenna FDA51 Series.
Please read carefully and follow these instructions before installing this product.

Features

- Allows shark-fin antennas on vehicles originally equipped with pole antennas.
- Helical antenna wire to ensure maximum radio signal.
- Easy installation using provided double sided tape.
- Rubber lining ensures compability to many applications to match vehicle's roof curve.
- Not having to worry about the effect car washes and low ceiling garages have on the antenna.
- Adds a luxury and sophisticated look to your vehicle.

For Safe Operation

■ Please take the following precautions during installation and operation of this antenna to precent accidents resulting in injury or death by fire or electrical shock.
- This antenna is only compatible for AM/FM signals.
- The joining terminal is to be connected to the base of the factory antenna only.
- Do not disassemble or alter the antenna. This will also void warranty.

Beat-Sonic USA
14778 Beach Blvd. La Mirada, CA 90638
Tel: 714-994-1085 Fax: 714-994-1085
URL: htt://www.beatsonicusa.com E-mail: info@beatsonicusa.com

Specification

Reception Frequency:	FM (76.0MHz - 108.00MHz) AM (530KHz - 1,710KHz)
Antenna Form:	Helical Antenna
Installation Method:	Joining terminal to base of factory antenna
Unit Dimensions (mm):	160(W)×92(D)×64(H)
Attachment Method:	Using 3M double-sided tape
Screw Type:	M5 Screw

Contents

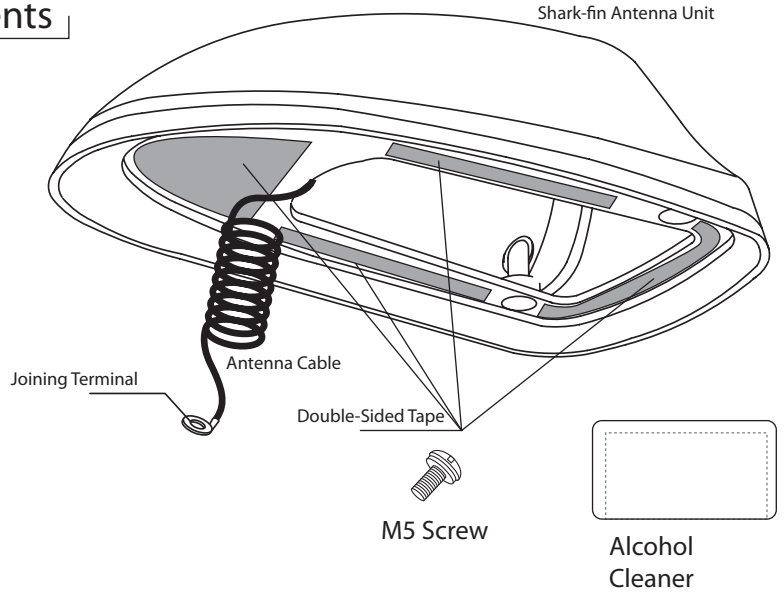

Shark-Fin Radio Antenna Installation Instructions

① Remove the OEM pole antenna.

The OEM pole antenna is easily removed by unscrewing counter-clockwise from the antenna base.

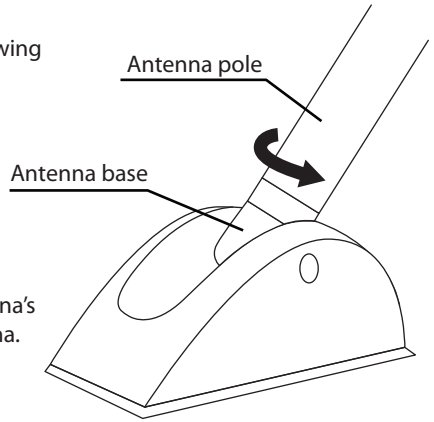

Caution: Clean all the dust or rust around the antenna's screw hole after dismounting the OEM pole antenna.

② Clean the area around the antenna base

Using the included alcohol wipe, clean the area around the antenna base thoroughly.
*Place the masking tape before using the alcohol wipe.

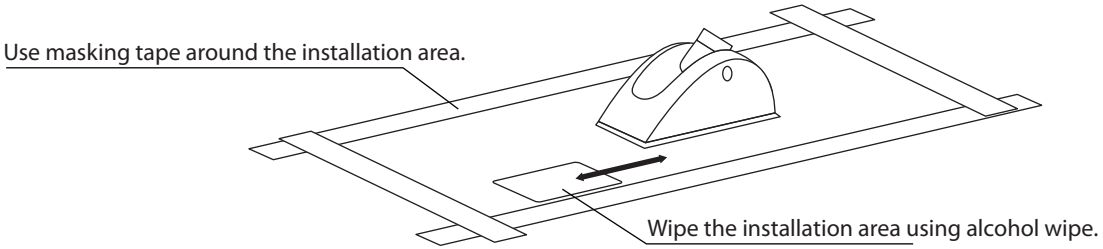

③ The cable terminal of the shark-fin radio antenna is installed on the base.

The joining terminal is connected from the shark-fin antenna with a metal screw to the base.

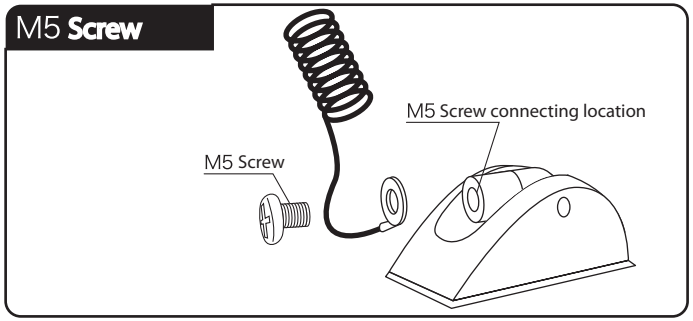

Caution:

Please confirm electric connection before the antenna is fastened to the roof

④ The shark-fin radio antenna is secured over the factory antenna base.

After confirming location to secure the antenna, remove the double sided tape cover to expose the adhesive side and secure over the antenna base and on the roof.
Press and hold for 1 minute to ensure maximum contact.